

SF-6PXXX

(xxx=260w-280w)

PRODUCT SPECIFICATION


- Industry leading module power output warranty
- International quality, safety and performance certifications
- Manufacturing facility certified to ISO9001 quality management system standards
- Beautiful appearance, good durability & easy installation
- Special design in accordance with requirements of customers



QUALITY DESIGN | GREAT DURABILITY | EASY INSTALLATION

WARRANTIES

- 10 years for product defects in materials & workmanship
- 10 years for 90% of warranted minimum power output
- 25 years for 80% of warranted minimum power output
- 25 years linear warranty

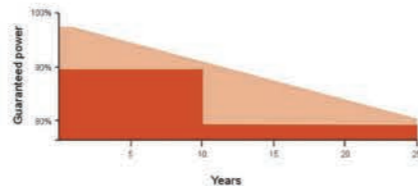

SF-6PXXX 260W~280W PRODUCT SPECIFICATION

Electrical parameters at standard test conditions
(STC:AM=1.5, 1000W/m², Cells Temperature 25°C)

Typical type	280W	275W	270W	265W	260W
Max power(Pmax)	280	275	270	265	260
Max power voltage(Vmp)	32.30	32.00	31.70	31.40	31.10
Max power current(Imp)	8.69	8.61	8.52	8.44	8.37
Open circuit voltage(Voc)	39.40	39.10	38.80	38.60	38.10
Short circuit current(Isc)	9.20	9.15	9.09	9.03	8.98
Cell efficiency(%)	19.76	19.41	19.06	18.70	18.35
Module Efficiency(%)	17.11	16.80	16.50	16.19	15.89
Max system voltage	DC1000V				
Maximum Series Fuse Rating	20A				

Mechanical Data

Dimensions	1640x992x35mm
Weight	18kgs
Front glass	3.2 mm tempered glass
Output cables	4 mm ² symmetrical lengths 900 mm
Connectors	MC4 compatible IP67
Cell type	Poly Crystalline Silicon 156mmx156mm
Number of cells	60 cells in series

Temperature Characteristics

Temp.Coeff.of Isc(TK Isc)	0.045% / °C
Temp.Coeff.of Voc(TK Voc)	(-0.34%) / °C
Temp.Coeff.of Pmax(TK Pmax)	(-0.47%) / °C
Operating temperature	(-40~+85%) °C
Normal operating cell temperature	45±2°C


Packing Configuration

Container	20'GP	40'HQ
Pieces per pallet	64	68
Pallets per container	6	14
Pieces per container	412	952


Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730
System certs	ISO 9001, ISO14001
Certifications	TUV, CE, CEC, CHUBB
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Positive tolerance	0~+3%
Junction box	≥ IP65
Warranties	10 years material and workmanship and 25 years output at least 80%


Dimensions and Structure

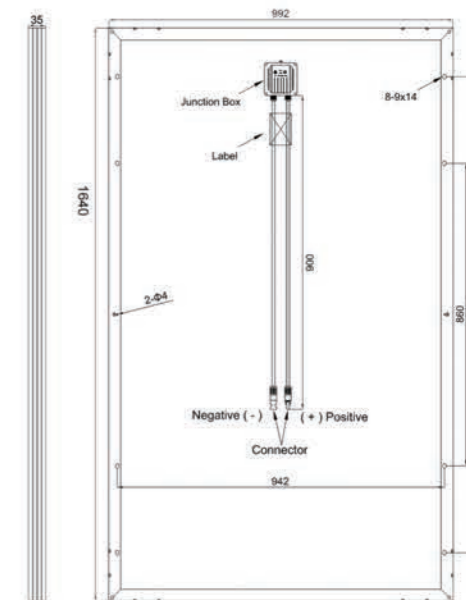

I-V Curve

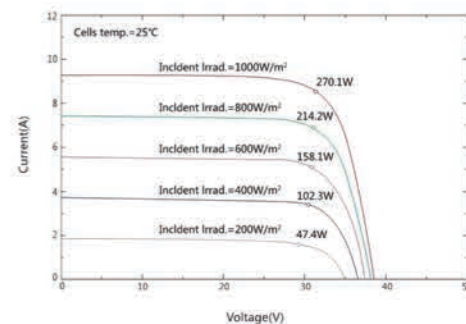

I-V Curves at different irradiance

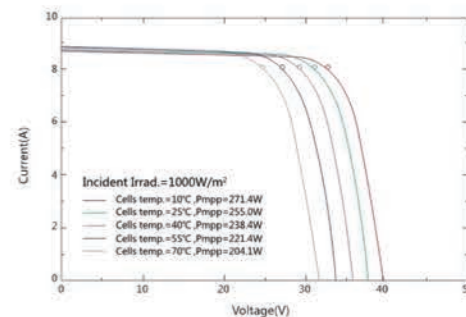

I-V Curves at different temperature